



48"Ø MANHOLE - WITH 30° SLOPE

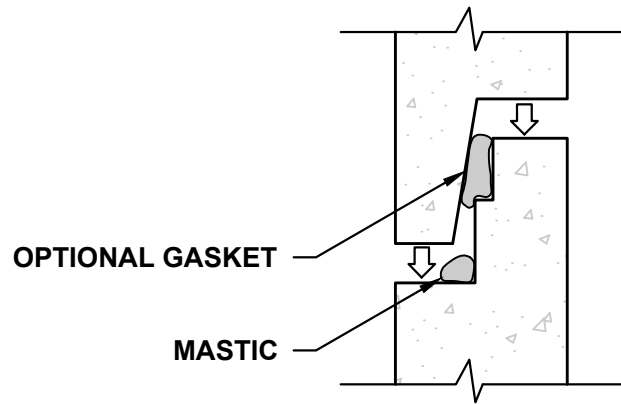

JOINT DETAIL

STANDARD JOINT SEALANT IS MASTIC.
RUBBER GASKET IS OPTIONAL.

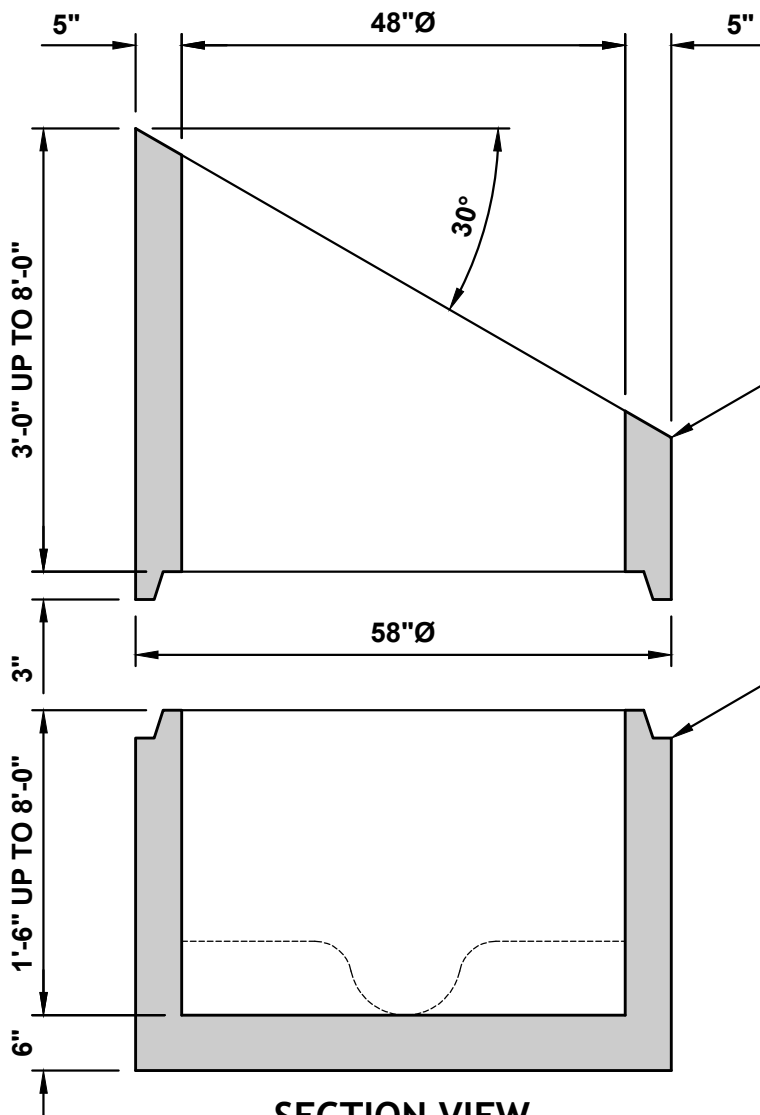

SECTION VIEW

48"Ø SLOPED SECTION

- 3'-0" (1,535LBS)
- 4'-0" (2,420LBS)
- 5'-0" (3,305LBS)
- 6'-0" (4,190LBS)
- 7'-0" (5,075LBS)
- 8'-0" (5,960LBS)

48"Ø MANHOLE MONO BASE (PRECHANNEL OPTIONAL)

- 1'-6" (2,765LBS)
- 2'-0" (3,205LBS)
- 3'-0" (4,090LBS)
- 4'-0" (4,935LBS)
- 5'-0" (5,710LBS)
- 6'-0" (6,595LBS)
- 7'-0" (7,480LBS)
- 8'-0" (8,365LBS)

NOTES:

1. MANHOLE ASSEMBLY CONFORMS TO ASTM-C478.
2. ALL MANHOLE JOINTS SEALED WITH MASTIC OR RUBBER GASKET.
3. REINFORCING AS PER WSDOT STANDARD PLANS.